


Retroreflective diffuse sensors with background suppression

-



BU: blue

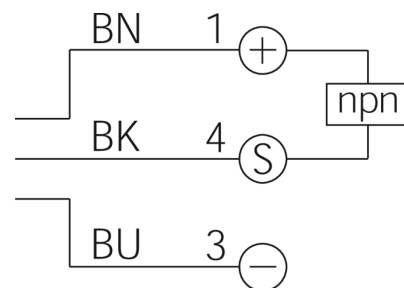

+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com


212976
OH21-50NS-0.3T3
Retroreflective diffuse sensors with background suppression

Technical data (typ.)		+20°C, 24 V DC
Background suppression		Yes
Light spot size		> Ø 4 mm
Scanning range		1 ... 50 mm
Standardized measuring plate		200 x 200 mm (white)
Sensitivity adjustment		no setting elements
Display		LED Green - Status, yellow - Switching output
Switching frequency		1000 Hz
Ambient temperature during operation		-25 ... +60 °C
Protection type		IP 65 / IP 67
Connection		Pigtail, 0.3 m, M8, 3-pin
Connection cable		TK ...
More information / accessories		https://www.di-soric.com/212976