





212990
OS21-0.3T3
Through-beam sensor, transmitter

- Miniature design
- Mounting element made of metal
- Long range

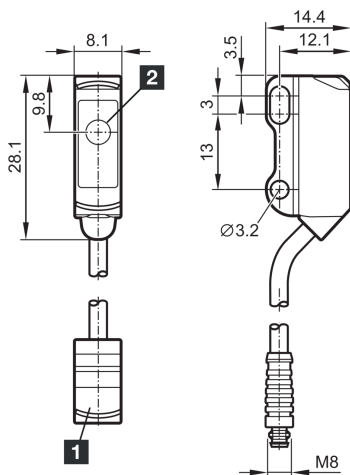

1) LED

2) Transmitter

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 ... 30 V DC
No-load current (max.)	15 mA
Inverse polarity protection	Yes
Housing dimensions	28.1 x 8.1 x 14.4 mm
Housing length	8.1 mm
Housing height	28.1 mm
Housing width	14.4 mm
Housing material	Stainless steel / Plastic
Material of cable	PVC
Material	Plastic (Window / optics)
Weight	21 g
Protection class	III, operation on protective low voltage
Operating principle	Through-beam sensor
Evaluation	digital
Design	Cuboid design
Consisting of	Transmitter
Light source	LED
Color	red
Wavelength	633 nm
Modulation	Clocked

**212990****OS21-0.3T3****Through-beam sensor, transmitter****Technical data (typ.)****+20°C, 24 V DC**

Light spot size	Ø 200 mm (at distance of 3000 mm)
Range	3000 mm
Standardized measuring plate	200 x 200 mm (white)
Sensitivity adjustment	no setting elements
Display	LED Green - Status
Ambient temperature during operation	-25 ... +60 °C
Protection type	IP 65 / IP 67
Connection	Pigtail, 0.3 m, M8, 3-pin
Connection cable	TK ...

More information / accessories**<https://www.di-soric.com/212990>**