




**213004**  
**LAT45-10MP3-B5**  
**Laser distance sensors**

- IO-Link
- Long range
- Very good color and surface independence
- Red-light laser for simple alignment
- Measured values on display
- Easy to operate
- Robust metal housing

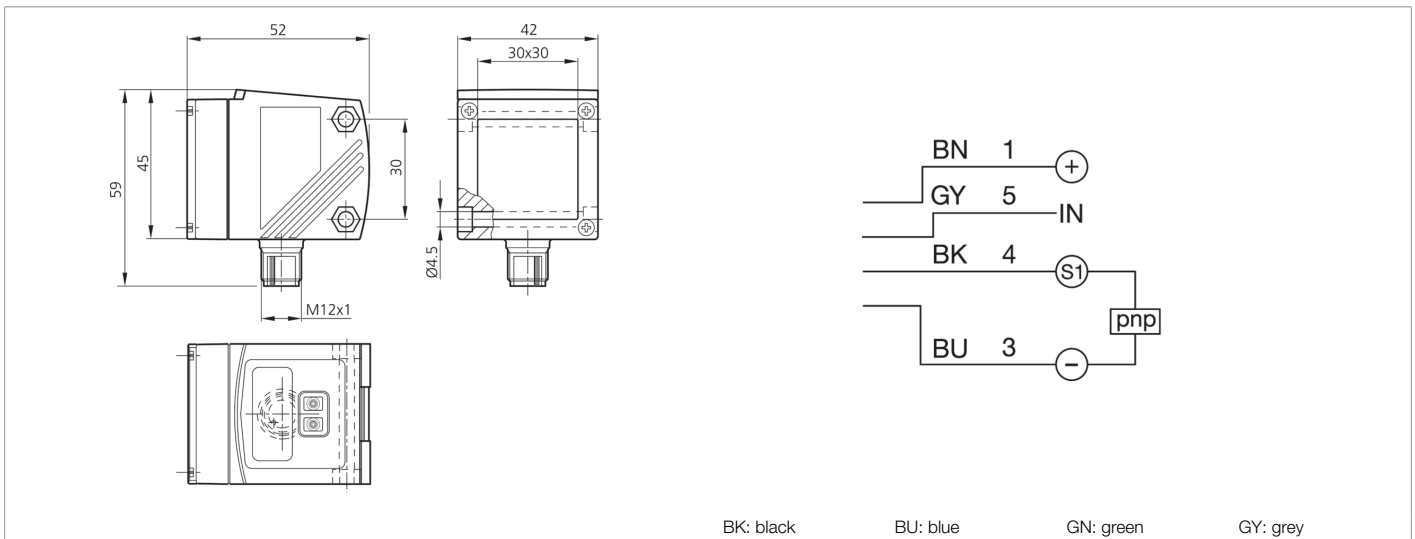

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 ... 30 V DC (Supply Class 2)
No-load current (max.)	150 mA
Housing dimensions	45 x 52 x 42 mm
Housing material	Die-cast zinc (Black, painted)
Material window / optics	Glass
Weight	309 g
Protection class	III, operation on protective low voltage
Approvals	UL
Design	Cuboid design
Switching output	pnp (1x), 200 mA, NO/NC, configurable
Interface	<ul style="list-style-type: none"> <li>■ IO-Link V1.1, COM2</li> <li>■ Smart Sensor Profile</li> </ul>
Light source	Laser
Laser class	CLASS 2 LASER PRODUCT, 2 (IEC 60825-1)
Color	Red
Background suppression	10000 ... 100000 mm
Light spot size	18 x 20 mm (at distance of 10 m)
Ambient light immunity	100 kLx
Measuring range	200 ... 10000 mm (90 % remission)
Resolution	1.0 mm (90% remission, measuring frequency 15 Hz)



**213004**  
**LAT45-10MP3-B5**  
**Laser distance sensors**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Reproducibility	4.5 ... 50 mm (90% remission, measuring frequency 15 Hz)
Sensitivity adjustment	Keypad
Display	LED Green - Status, yellow - Switching output
Switching frequency	5 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 5-pin
Connection cable	VK ... /5
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/213004">https://www.di-soric.com/213004</a></b>