



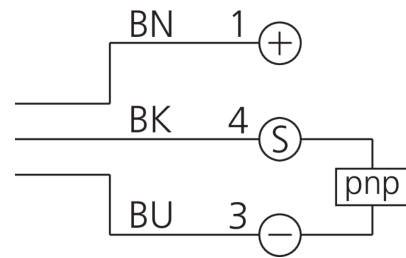

**213027**  
**OTM05-20PS-T3**  
**Retroreflective diffuse sensor**

- Extremely small design
- Red light
- Scanning range preset
- Stainless steel housing
- Can be installed countersunk
- Large temperature range

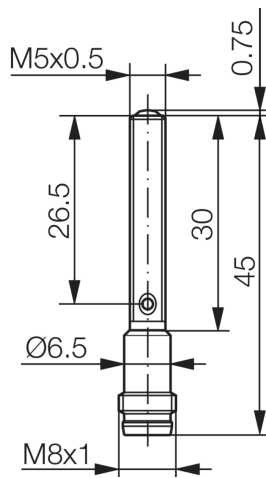

BK: black      BN: brown      BU: blue

**Function**



**Technical data (typ.)**

**+20°C, 24 V DC**

Service voltage	10 ... 30 V DC
No-load current (max.)	15 mA
Inverse polarity protection	Yes
Thread	M5 x 0.5
Housing length	45.8 mm
Housing material	Stainless steel (V2A)
Material	Plastic (Window / optics)
Weight	4 g
Protection class	III, operation on protective low voltage
Operating principle	Retroreflective diffuse sensor
Evaluation	digital
Design	Thread
Switching output	pnp, 100 mA, NO
Voltage drop (max.)	2 V
Light source	LED
Color	Red
Wavelength	630 nm
Light spot size	8 x 10 mm (at distance of 20 mm)
Scanning range	20 mm
Standardized measuring plate	200 x 200 mm (white)

**213027****OTM05-20PS-T3****Retroreflective diffuse sensor****Technical data (typ.)****+20°C, 24 V DC**

Sensitivity adjustment

no setting elements

Display

LED yellow - Switching output

Switching frequency

1000 Hz

Ambient temperature during operation

-25 ... +65 °C

Protection type

IP 67

Connection

Connector, M8, 3-pin

**More information / accessories**<https://www.di-soric.com/213027>