




**213808**  
**MB-R-1540-B5**  
**Machine lighting, semicircle**

- Extended temperature range -20 .. +50 °C
- 3 mm safety glass with opal-white glare reduction
- M12 plug connector for easy wiring
- Industrial quality due to IP 67
- Homogeneous light distribution
- Pleasant, neutral white light

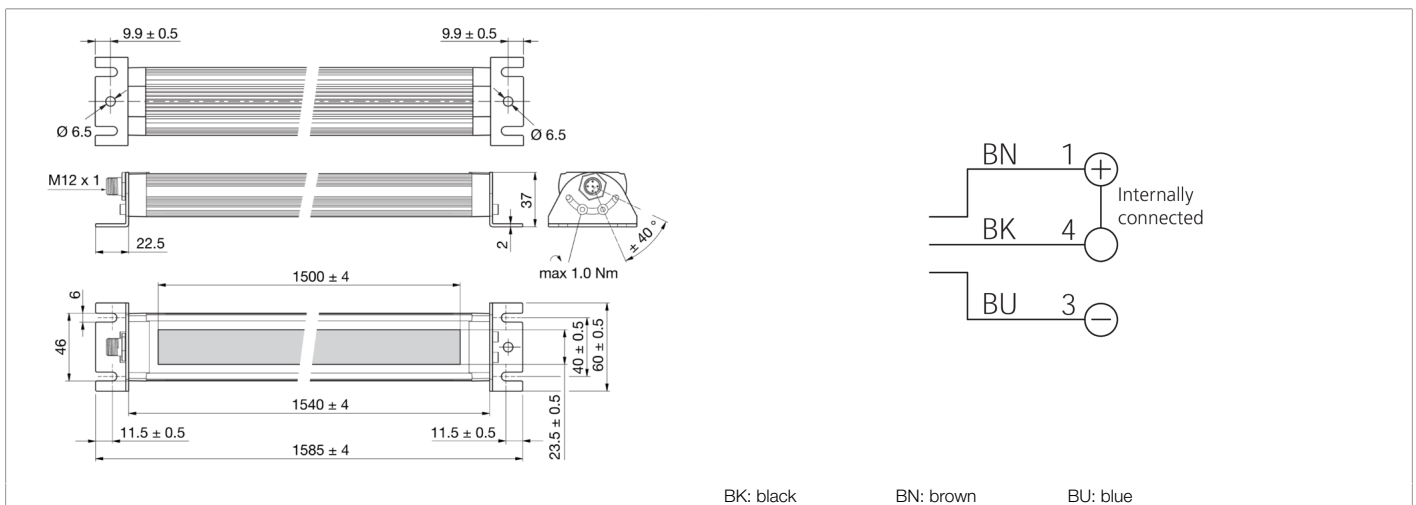

Function													

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (± 10%)
Internal power consumption	1360 mA (24 V DC)
Power	33.0 W (24 V)
Inverse polarity protection	Yes
Cascadable	Not cascadable
Illuminated area	1500 x 23.5 mm
Housing material	Aluminum (natural, Anodized)
Material	Tempered safety glass, diffuse (Diffusor)
Weight	2110 g
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Approvals	UL
Model	Machine lighting, semicircle
Service life	> 50.000 h (L70/B10)
Product series	MB-R
Energy efficiency class (VO 2019/2015)	F (A - G)
Color	White (5 000 K)
Deflection angle FWHM	102° (typ.)
Luminous flux	3260 lm
Light yield	109 lm/W
Color rendering index Ra	> 80



**213808**

**MB-R-1540-B5**

**Machine lighting, semicircle**

**Technical data (typ.)**

**+20°C, 24 V DC**

Light intensity

- 3600 Lux (250.0 mm)
- 1700 Lux (500.0 mm)
- 700 Lux (1000.0 mm)
- 350 Lux (1500.0 mm)
- 200 Lux (2000.0 mm)

Shock/vibration load

30 g, 11 ms / 10 ... 55 Hz, 1.0 mm

Ambient temperature during operation

-20 ... +50 °C

Protection type

IP 67

Connection

Connector, M12, 5-pin (A-coded)

**More information / accessories**

<https://www.di-soric.com/213808>