





**213809**  
**SBT-F-GYR-R50-3S-B5**  
**Signal column**

- Status display 360°
- Good signal effect thanks to state-of-the art, efficient LEDs
- Low energy consumption
- Immediately usable, direct predefined segment activation
- Simple installation (M30 threading)
- Assembly accessories optionally available

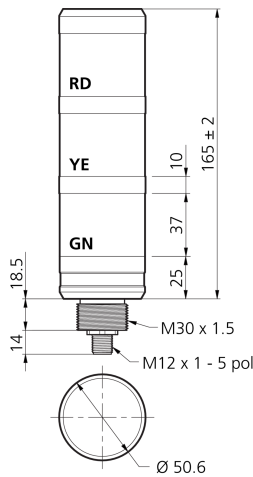

PIN	Signal	Connection cable wire color
1	Red LED	Brown
2	Not Connected	White
3	GND	Blue
4	Green LED	Black
5	Yellow LED	Grey

**Function**



**Technical data (typ.)**

**+20°C, 24 V DC**

Service voltage	24 V DC (Supply Class 2)
Internal power consumption	140 mA (24 V DC)
Power	3.4 W (24 V)
Inverse polarity protection	Yes
Illuminated area	50 x 37 mm (Ø x H / segment)
Dimensions of luminaire unit (Ø x H)	Ø 50.6 x 165 mm
Number of segments	3
Housing material	Aluminum (natural, Anodized)
Material	Polycarbonate (Diffusor)
Weight	270 g
Protection class	III, operation on protective low voltage
Approvals	UL
Model	Signal column
Color selection	Red, green, yellow
Number of inputs/outputs	3/0
Level (Hi/Lo) inputs	24V / 0V
Color	Red, green, yellow
Vibration load	10 ... 55 Hz / 0.35 mm
Ambient temperature during operation	0 ... +50 °C
Protection type	IP 65
Connection	Connector, M12, 5-pin

**213809****SBT-F-GYR-R50-3S-B5****Signal column****Technical data (typ.)****+20°C, 24 V DC**

Connection cable

VK ... /5-SB

**More information / accessories**<https://www.di-soric.com/213809>