



BE-A240-LTK

Schutzscheibe
Safety screen
Vitre de protection

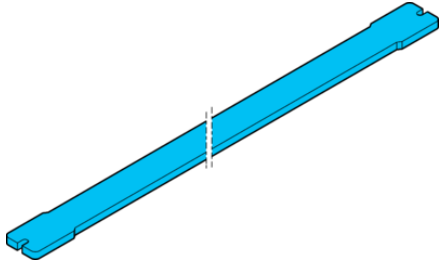

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com

213567

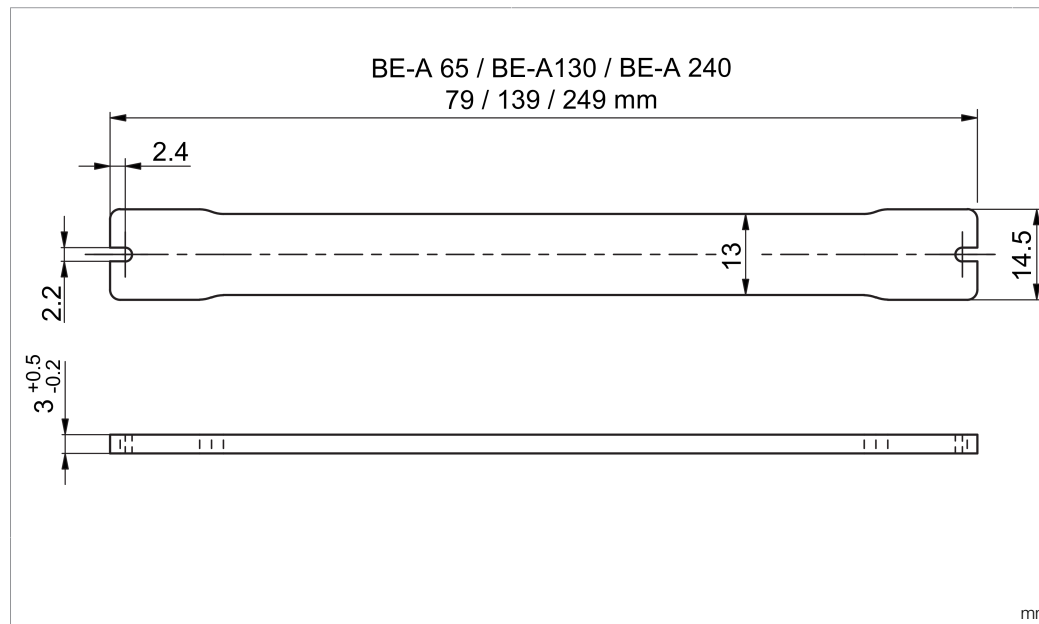


Technische Daten	Technical data	Caractéristiques techniques	
Geeignet für	To be used for	Convient pour	Aufflichtbeleuchtungen BE-A240 ... / Barlights BE-A240 ... / Barres d'éclairage BE-A240 ...
Abmessungen	Dimensions	Dimensions	14,5 x 3 x 249 mm / 14.5 x 3 x 249 mm / 14,5 x 3 x 249 mm
Material Filter	Material of filter	Matériau filtre	PC
Gewicht	Weight	Poids	20 g
Besonderheiten	Characteristics	Particularités	Folienstruktur parallel zur schmalen Seite / Film structure parallel to narrow side / La structure de la feuille est parallèle au côté le plus court
Umgebungstemperatur Betrieb	Ambient temperature during operation	Température ambiante de fonctionnement	0 ... +40 °C
Lieferumfang	Scope of delivery	Contenu de la livraison	1 Schutzscheibe, Befestigungsmaterial / 1 safety screen, Fixing material / 1 vitre de protection, Matériel de fixation

Stand 03.11.23, Änderungen vorbehalten
As of 11/03/23, subject to change
État 03.11.23, sous réserve de modifications




BE-A240-LTK

防护玻璃

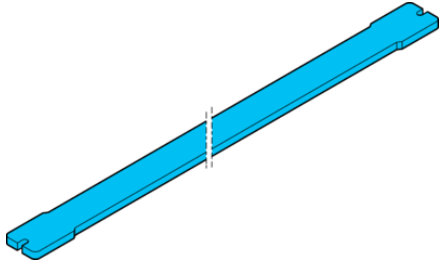

di-soric GmbH & Co. KG
 Steinbeisstraße 6
 DE-73660 Urbach
 Germany
 Tel: +49 (0) 7181/9879-0
 info@di-soric.com · www.di-soric.com

213567

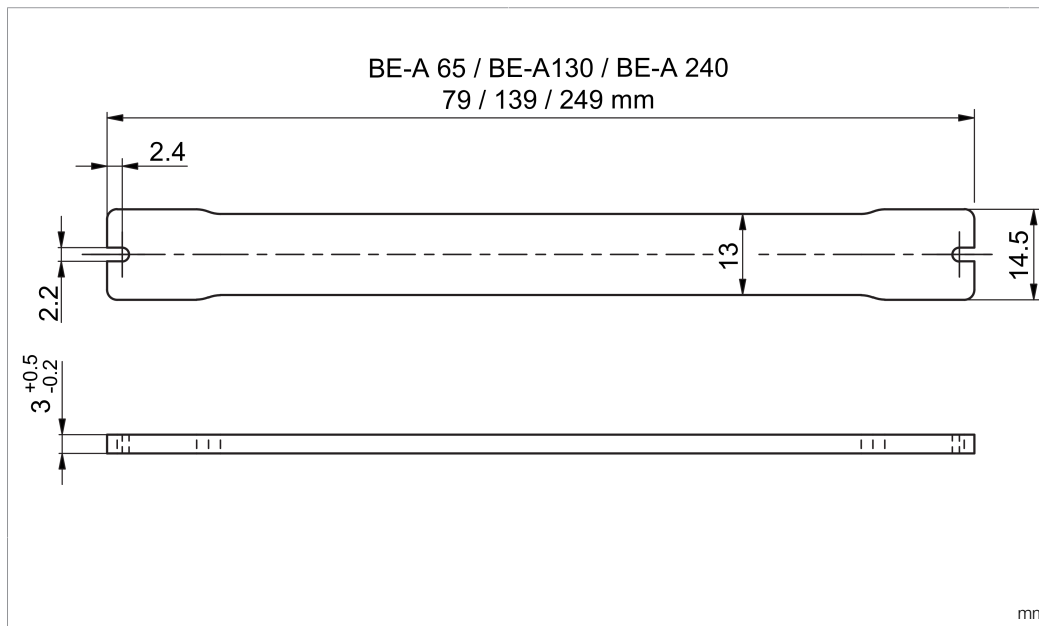

技术数据

适合用于	条形光源 BE-A240 ...
尺寸	14,5 x 3 x 249 mm
滤光片材料	PC
重量	20 g
特点	薄膜结构与窄边平行
工作环境温度	0 ... +40 °C
供货范围	1 块防护玻璃, 固定材料

版本 23.11.03, 保留变更权