


# BEK-A300-DIF

Diffusor  
Diffusor  
Diffuseur

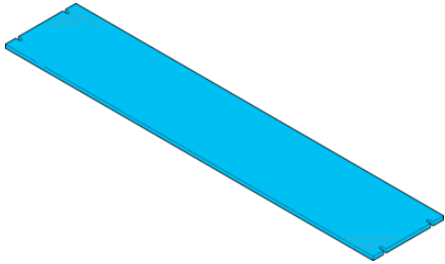

di-soric GmbH & Co. KG  
Steinbeisstraße 6  
DE-73660 Urbach  
Germany  
Tel: +49 (0) 7181/9879-0  
info@di-soric.com · www.di-soric.com

208185




Technische Daten	Technical data	Caractéristiques techniques	+20°C, 24 V DC
Geeignet für	To be used for	Convient pour	Aufflichtbeleuchtungen BE-A300..., Aufflichtbeleuchtungen BEK-A300... / Barlights BE-A300..., Barlights BEK-A300... / Barres d'éclairage BE-A300..., Barres d'éclairage BEK-A300...
Abmessungen	Dimensions	Dimensions	60 x 313 x 3 mm
Material Filter	Material of filter	Matériau filtre	Fenster, PMMA, kratzfest beschichtet / Window, PMMA, hardcoated / Fenêtre, PMMA, revêtement résistant aux rayures

Stand 16.07.24, Änderungen vorbehalten  
As of 07/16/24, subject to change  
État 16.07.24, sous réserve de modifications



**BEK-A300-DIF**

漫射体

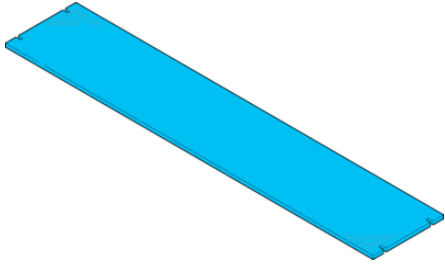

di-soric GmbH & Co. KG  
 Steinbeisstraße 6  
 DE-73660 Urbach  
 Germany  
 Tel: +49 (0) 7181/9879-0  
 info@di-soric.com · www.di-soric.com

208185



**技术数据**

适合用于

尺寸

滤光片材料

**+20°C, 24 V DC**

条形光源 BE-A300..., 条形光源 BEK-A300...

60 x 313 x 3 mm

窗口, PMMA, 防刮涂层

版本 24.07.16, 保留变更权