


- [illegible]

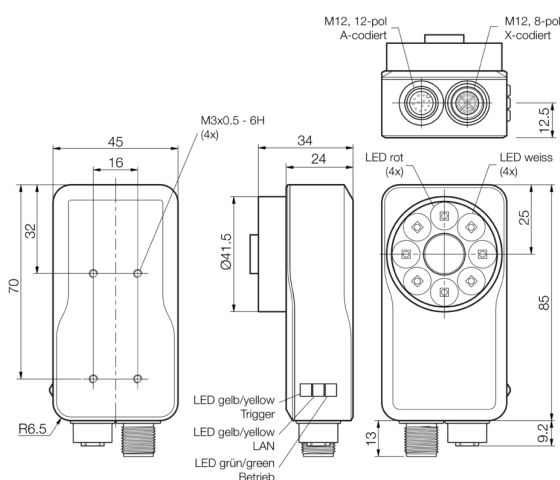

12-pol A-codiert		
	1 SPS_IN0	7 +UB
	2 SPS_IN1	8 GND
	3 SPS_OUT_2	9 NC
	4 SPS_OUT_3	10 Trigger IN
	5 READY	11 SPS_OUT_0
	6 COMMON INTERFACE	12 SPS_OUT_1

8-pol X-codiert		
	1 LAN A+	5 LAN D+
	2 LAN A-	6 LAN D-
	3 LAN B+	7 LAN C-
	4 LAN B-	8 LAN C+

+20°C, 24 V DC

© di-soric . 保留变更权 . 2023.12.05 . 侧 1 (2)



技术数据 (典型)		+20°C, 24 V DC
电压降 (最大)		2 V
接口		■ 以太网 ■ 数字输入/输出
协议		TCP/IP, FTP/SFTP, Profinet
颜色		红/白可切换 (内部)
焦距		8 mm (可更换 S 型接口镜头)
光学格式		1/4"
分辨率		736 x 480 Pixel
像素大小		4.5 x 4.5 µm
工作距离		50.0 ... 2000 mm
显示		LED 绿色 - 运行, 黄色 - DATA-Link 黄色 - 触发器
FPS - 每秒帧数 (最大)		30 Bilder/Sekunde
闪光长度		< 2 ms
工作环境温度		0 ... +50 °C
耐振动/冲击		10 ... 55 Hz / 1.0 mm / 30 g / 11 ms
防护等级		IP 67
连接		插头, M12, 12 针 (A 编码)
连接 2		插口, M12, 8 针
电缆		连接电缆最长 25 m
更多信息 / 附件		https://www.di-soric.com/213359