


视觉传感器 - CS 60

-

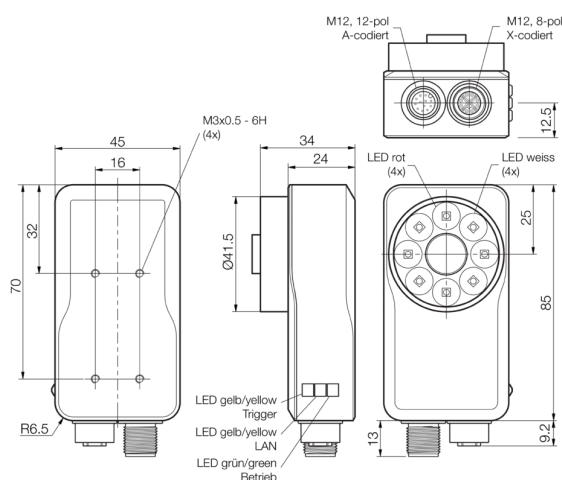

12-pol A-codiert		
	1 SPS_IN0	7 +UB
	2 SPS_IN1	8 GND
	3 SPS_OUT_2	9 NC
	4 SPS_OUT_3	10 Trigger IN
	5 READY	11 SPS_OUT_0
	6 COMMON INTERFACE	12 SPS_OUT_1

8-pol X-codiert		
	1 LAN A+	5 LAN D+
	2 LAN A-	6 LAN D-
	3 LAN B+	7 LAN C-
	4 LAN B-	8 LAN C+

[illegible]

© di-soric . 保留变更权 . 2023.12.05 . 侧 1 (2)



213362
CS60-BM38-EP15/300ID
视觉传感器 - CS 60

技术数据 (典型)	+20°C, 24 V DC
电压降 (最大)	2 V
接口	■ 以太网 ■ 数字输入/输出
协议	TCP/IP, FTP/SFTP, Profinet
颜色	红/白可切换 (内部)
焦距	8 mm (可更换 S 型接口镜头)
光学格式	1/2.9"
分辨率	1456 x 1088 Pixel
工作距离	50.0 ... 2000 mm
显示	LED 绿色 - 运行, 黄色 - DATA-Link 黄色 - 触发器
FPS - 每秒帧数 (最大)	30 Bilder/Sekunde
闪光长度	< 2 ms
工作环境温度	0 ... +50 °C
耐振动/冲击	10 ... 55 Hz / 1.0 mm / 30 g / 11 ms
防护等级	IP 67
连接	插头, M12, 12 针 (A 编码)
连接 2	插口, M12, 8 针 (X-coded)
电缆	连接电缆最长 25 m
更多信息 / 附件	https://www.di-soric.com/213362