




**210075**  
**IOL-Master**  
**IO-Link Device Tool**

- Universal IO-Link Master with PC software
- For devices with IO-Link Specification 1.0.1 and 1.1
- Status LED for IO-Link and SIO mode
- M12 connection for devices
- Up to 80 mA over USB connection
- Up to 1 A with AC adapter

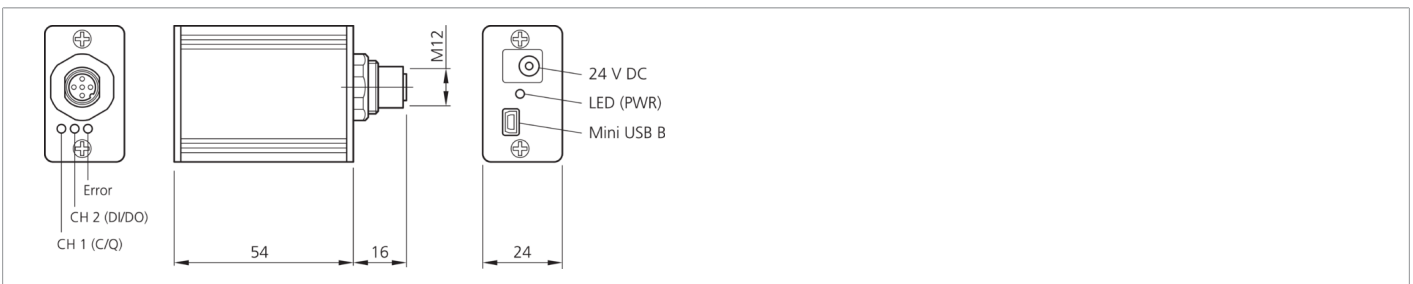

Function											

Technical data (typ.)	+20°C, 24 V DC
Inverse polarity protection	Yes
Power supply	5 V / 500 mA (PC USB), 24 V / 80 mA (IO-Link device from USB), 24 V / 1 A (IO-Link device from the power supply)
Protection class	III, operation on protective low voltage
To be used for	For devices with IO-Link Specification 1.0.1 and 1.1
Scope of delivery	USB IO-Link Master V2, USB A-B cable, Power supply 24 V DC / 24 W
Functions	With PC
Communication	IO-Link specification V 1.1, IO-Link port class A
Ambient temperature during operation	0 ... +45 °C
Protection type	IP 20
Connection	USB (Mini USB B, TYPE 2.0)
Connection 2	Socket, M12
Connection 3	Power supply

More information / accessories	<a href="https://www.di-soric.com/210075">https://www.di-soric.com/210075</a>
--------------------------------	---