




**204195**  
**OGL 55/54 P6L-RIBS**  
**High-performance angled light barriers**

- Intelligent contamination output with LED display
- High function reserve
- Extremely dirt-resistant
- Advanced PE-contact
- Optical axis approachable in x-, y- and z-direction
- Universal mounting
- Robust metal housing

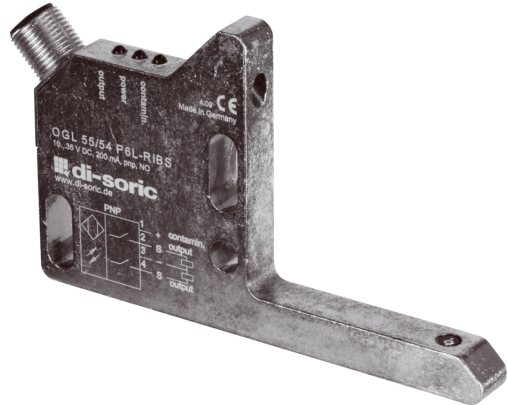

1) Transmitter  
 2) Receiver  
 3) LED CONTAMINATION

4) LED OPERATION  
 5) LED OUTPUT

BK: black      BN: brown      BU: blue      WH: white

BN 1 (+) Schaltausgang  
 Operating output  
 Commutation de sortie

BK 4 (S)

Wh 2 (S) Verschmutzungsausgang  
 Contamination output  
 Sortie d'encrassement

BU3 (-) pnp

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current (max.)	45 mA
Insulation voltage endurance	500 V
Leg length internal	55/54 mm
Housing dimensions	65 x 106 x 10 mm
Housing length	106 mm
Housing height	65 mm
Housing width	10 mm
Housing material	Die-cast zinc
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Optical
Evaluation	digital
Design	Angle
Characteristics	High transmit power and dirt penetration
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Contamination output	pnp, 200 mA
Light source	LED



**204195**

**OGL 55/54 P6L-RIBS**

**High-performance angled light barriers**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Color	Red
Wavelength	660 nm
Modulation	Clocked
Ambient light immunity	5 kLx
Range	60 mm (optical axis)
Sensitivity adjustment	no setting elements
Switching frequency	200 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 4-pin
Connection cable	VK ...
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/204195">https://www.di-soric.com/204195</a></b>