


207694
BE-F100/100-F5-K
Area light

- High excess current factor
- Pulsed mode for inspection of fast moving objects
- Extremely powerful light for high depth of field
- Long life thanks to intelligent thermal management
- Homogeneous luminous field
- High protection type IP 67
- Robust metal housing

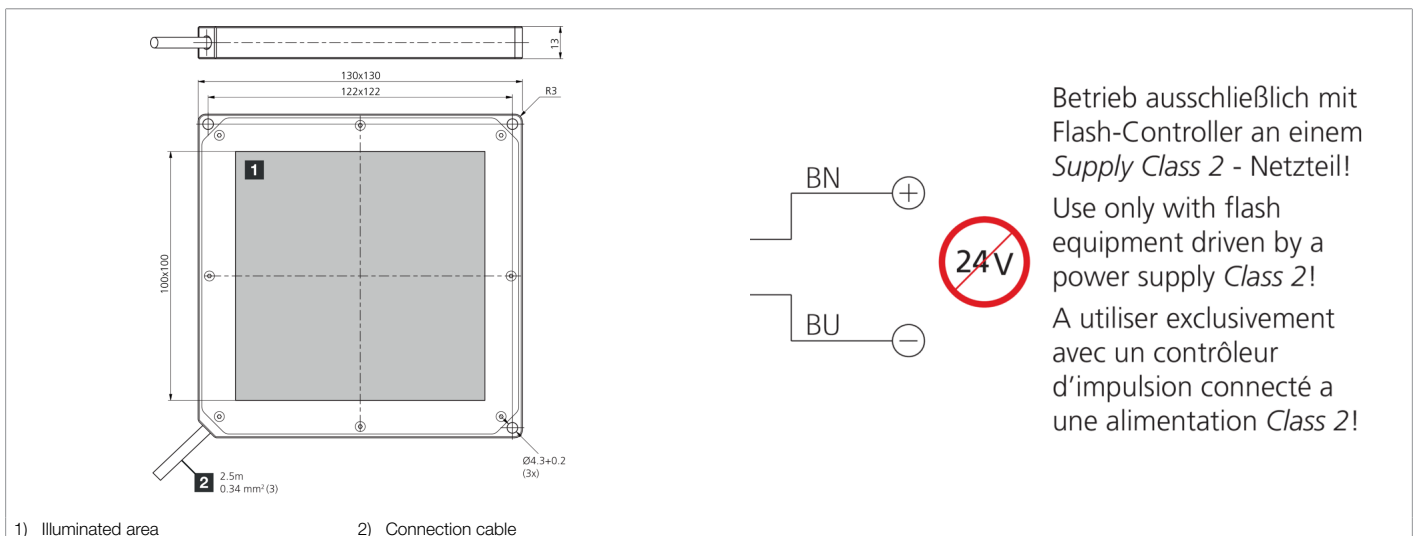

Betrieb ausschließlich mit Flash-Controller an einem *Supply Class 2* - Netzteil!
Use only with flash equipment driven by a power supply *Class 2*!
A utiliser exclusivement avec un contrôleur d'impulsion connecté à une alimentation *Class 2*!

Function									

Technical data (typ.)	+20°C, 24 V DC
Power consumption (in pulse / max.)	80.0 W
Energization factor (in pulse / max.)	9
Energization (in pulse / max.)	3200 mA
Service voltage	No constant voltage!
Insulation voltage endurance	500 V
Illuminated area	100 x 100 mm
Housing material	Aluminum (Black, Anodized)
Material	<ul style="list-style-type: none"> ■ Polyurethane (Cable) ■ PC, opal diffuse (Protection optics)
Risk group (DIN EN 62471)	Free group
Approvals	UL
Design	Area light
Light source	LED
Color	White (diffuse)
Wavelength	6500 K
Control	Flashable by means of flash controller
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 67
Connection	Cable, 2.5 m (flying leads, Use only with flash controller!)



207694

BE-F100/100-F5-K

Area light

[More information / accessories](#)

<https://www.di-soric.com/207694>