


200061
D7C 18 V 10 PSLK
Inductive proximity sensor

- Closed, all-steel sleeve
- 3-times the standard operating distance
- Same operating distance to steel and aluminum
- Housing and sensing face made of stainless steel
- Insensitive to aggressive cleaning agents, environmental influences and hot filings
- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

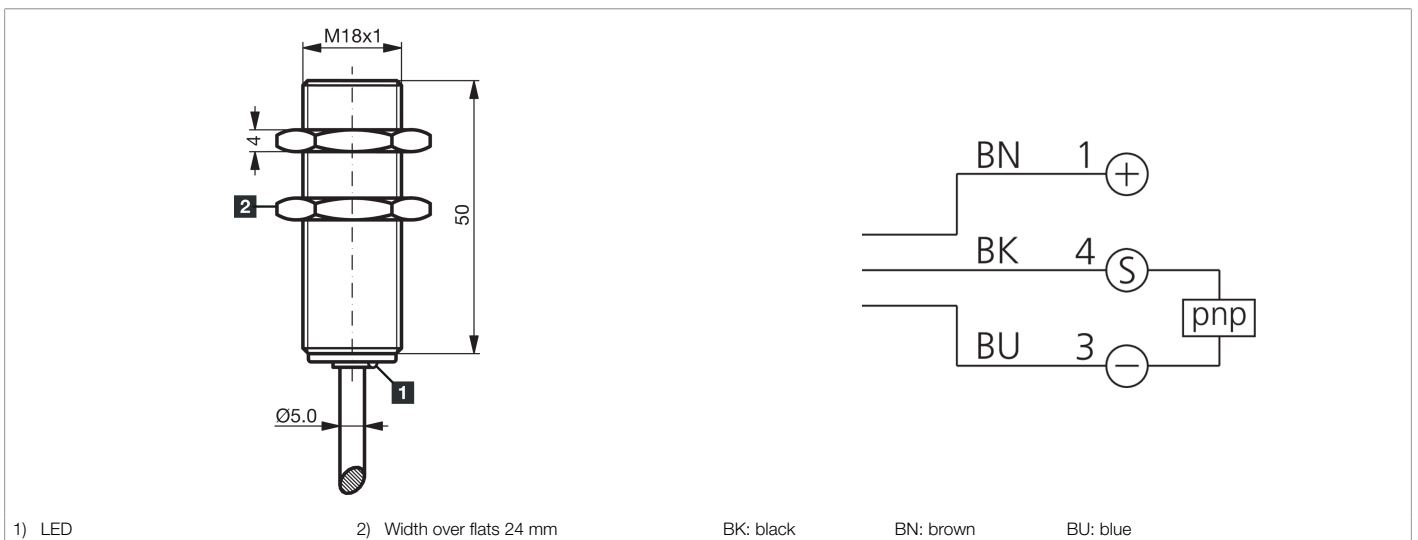

Function														

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
Internal power consumption	< 12 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	Flush
Thread	M18 x 1
Housing length	51 mm
Housing material	Stainless steel
Material of cable	Polyurethane
Tightening torque (max.)	50 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	extremely high operating distance, < 60 bar, Full-metal casing closed
Product series	INW-300 Full metal extended
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Switching distance (SN)	10 mm
Standardized measuring plate	30 x 30 x 1 mm
Switching hysteresis (max.)	15 % (5 % typ.)



200061

D7C 18 V 10 PSLK

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Switching frequency

200 Hz

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 69K

Connection

Cable, 2.0 m (flying leads)

More information / accessories

<https://www.di-soric.com/200061>