



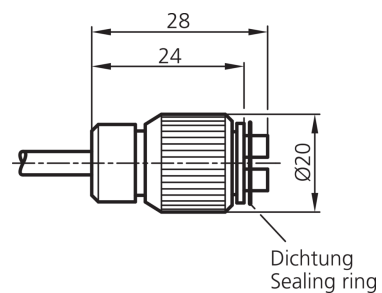

202018
WRB 130 MQ-10-0.6
Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

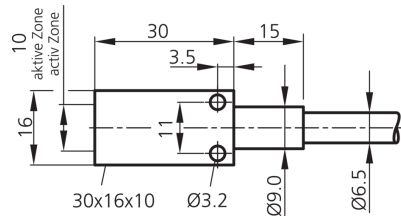

Technical data (typ.)		+20°C, 24 V DC	
Length		1,000 mm	
Dimension fiber bundle		10 mm x 0.6 mm	
Housing length		30 mm	
Housing height		10 mm	
Housing width		16 mm	
Light aperture		axial	
Bending radius		> 10 x tube-Ø	
Material of fiber		Glass fibers	
Material		<ul style="list-style-type: none"> ■ Aluminum (Sensor probe) ■ metal sleeve (Coating) 	
Operating principle		Diffuse sensor	
Design		Cuboid design	
Single fiber		Ø 0.05 mm	
To be used for		Amplifiers for glass fiber optics	
Opening angle		67°	
Scanning range		90 mm	
Temperature resistance		-40 ... +180 °C (temporarily up to +300 °C)	
Protection type		IP 60	
More information / accessories		https://www.di-soric.com/202018	