




**202416**  
**OGUTID 051 P3K-TSSL**  
**Fork light barrier**

- Adjustable pulse stretching
- High resolution
- Dynamic operating principle
- LED indicator for the teach procedure
- Very high contamination and functional reserve
- Light/dark switching

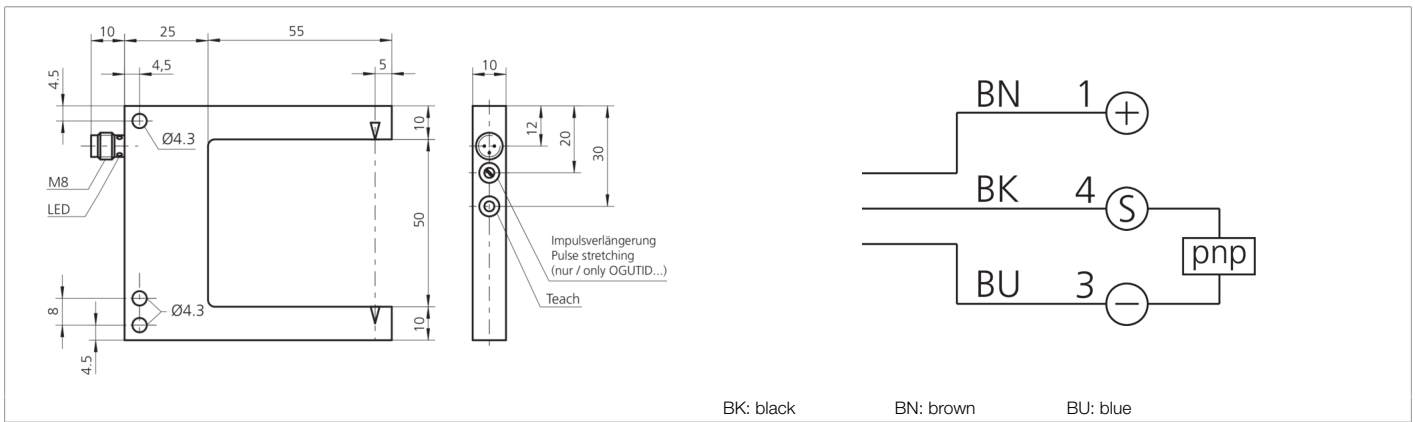

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 V DC ... 35 V (Supply Class 2)
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Leg length internal	55 mm
Housing dimensions	70 x 80 x 10 mm
Housing length	80 mm
Housing height	70 mm
Housing width	10 mm
Housing material	Die-cast zinc (Black, painted)
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Optical
Evaluation	dynamic
Design	Fork
Switching output	pnp, 200 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Color	Red
Wavelength	660 nm
Modulation	Clocked
Ambient light immunity	15 kLx
Fork opening	50 mm
Resolution	Ø 0.15 mm
Sensitivity adjustment	Teach button



**202416**  
**OGUTID 051 P3K-TSSL**  
**Fork light barrier**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Switching frequency	100 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/202416">https://www.di-soric.com/202416</a></b>