



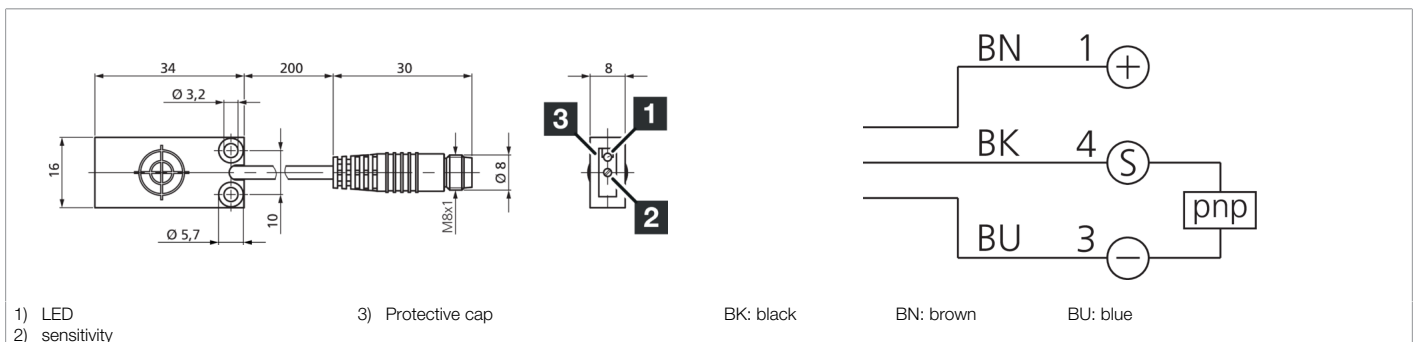

203177
KDCR 16 K 08S PSK-K-TSL
Capacitive proximity switch

- Detection of electrically conductive and electrically non-conductive materials
- Detection of liquids, powdery and solid materials
- Detection possible even through containers and packaging
- With mounting frame for universal fastening to hoses
- Adjustable sensitivity/self-compensating
- Metal connector
- Integrated amplifier
- Starting pulse suppression
- LED



Function												
											CE	

Technical data (typ.)	+20°C, 24 V DC
Service voltage	12 ... 30 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Installation type	non-flush
Housing dimensions	34 x 16 x 8 mm
Housing length	34 mm
Housing height	8 mm
Housing width	16 mm
Housing material	Plastic (PP)
Protection class	III, operation on protective low voltage
Operating principle	Capacitive
Evaluation	digital
Design	Cuboid design
Scope of delivery	Mini-screwdriver, Mounting frame, Fixing plate
Switching output	pnp, 50 mA, NO
Voltage drop (max.)	1.5 V
Switching distance (SN)	8 mm (adjustable), Self-compensating
Standardized measuring plate	24 x 24 x 1 mm
Sensitivity adjustment	Potentiometer (Self-compensating)
Switching frequency	2 Hz
Ambient temperature during operation	-30 ... +70 °C
Protection type	IP 67
Connection	Pigtail, 0.2 m, M8, 3-pin
More information / accessories	https://www.di-soric.com/203177