




204952
LTVTI 51 M 600 FN3K-IBS
Retroreflective diffuse sensor

- Red-light laser, with small laser spot
- Teach function
- Remote teach option with key-lock function
- Functional reserve indicator/contamination indicator
- Bright LED
- Light/dark switching

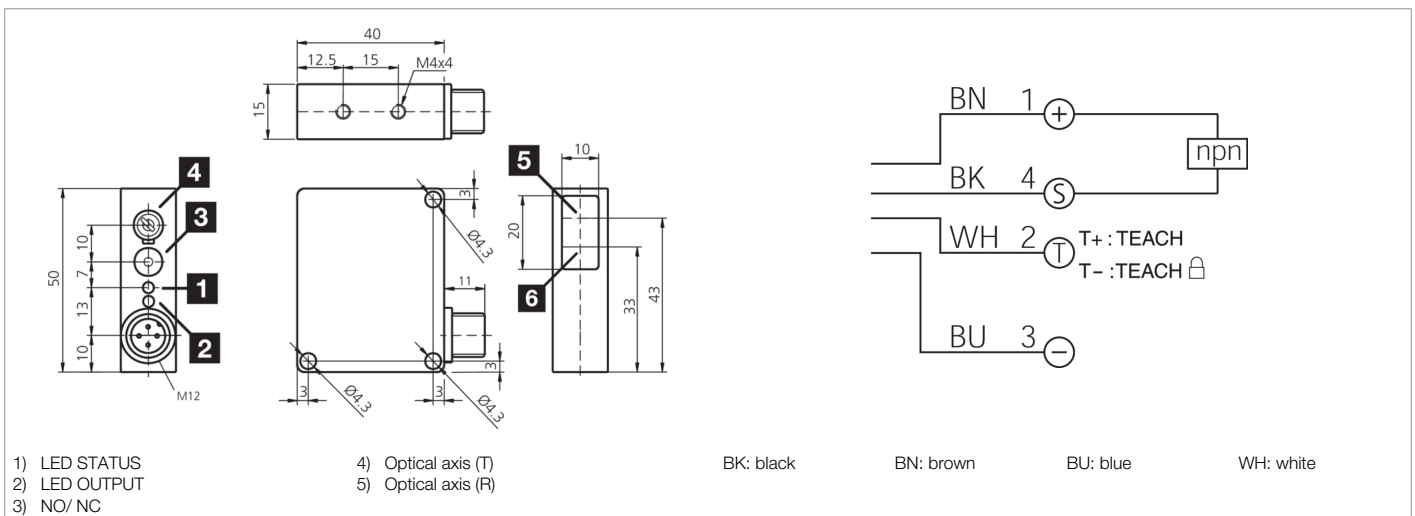

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Housing dimensions	50 x 40 x 15 mm
Housing length	40 mm
Housing height	50 mm
Housing width	15 mm
Housing material	Die-cast zinc (Black, painted)
Material	PMMA (Window)
Protection class	III
Operating principle	Retroreflective diffuse sensor
Evaluation	digital
Design	Cuboid design
Switching output	nnp, 200 mA, NO/NC, switchable
Light source	Laser
Laser class	CLASS 1 LASER PRODUCT, 1 (IEC 60825-1:2014 / EN 60825-1:2014)
Color	Red
Wavelength	650 nm (Pp < 1.8 mW t = 8 μs)
Modulation	Clocked
Light spot size	Ø 1.5 mm
Ambient light immunity	5 kLx



204952

LTVTI 51 M 600 FN3K-IBS

Retroreflective diffuse sensor

Technical data (typ.)	+20°C, 24 V DC
Scanning range	100 ... 600 mm
Switching hysteresis (max.)	10 %
Reproducibility	< 2 %
Sensitivity adjustment	Teach button, Remote teach
Switching frequency	500 Hz
Ambient temperature during operation	0 ... +45 °C
Protection type	IP 67
Connection	Connector, M12, 4-pin
Connection cable	VK ...
More information / accessories	https://www.di-soric.com/204952