




208256
DCR 40 K 04 V PSLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- LED

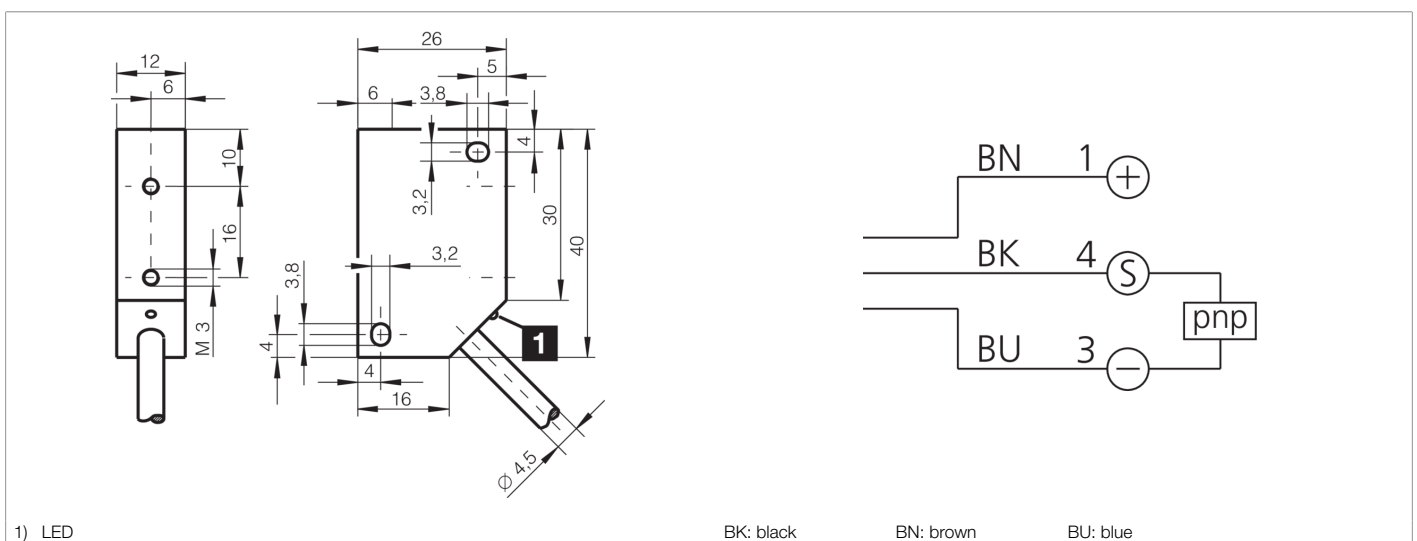

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V
Installation type	non-flush
Housing dimensions	40 x 12 mm
Housing length	26 mm
Housing height	40 mm
Housing width	12 mm
Housing material	Plastic
Material of cable	Polyurethane
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Cuboid design
Product series	INE Extended
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2.4 V
Switching distance (SN)	4 mm
Standardized measuring plate	12 x 12 x 1 mm
Switching hysteresis (max.)	< 15 %

**208256****DCR 40 K 04 V PSLK****Inductive proximity sensor****Technical data (typ.)****+20°C, 24 V DC**

LED Anzeige

Yes

Switching frequency

800 Hz ... 800 Hz

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 67

Connection

Cable, 2.0 m (flying leads)

More information / accessories<https://www.di-soric.com/208256>