




209338
DCB 12 MN 08 NS-B3
Inductive proximity sensor

- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- 4 LEDs for switching status display

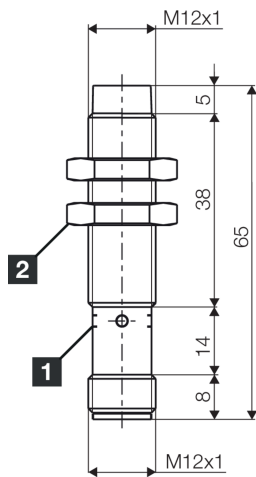

1) LED 4 x 90° (yellow) 2) Width over flats 17 mm BK: black BN: brown BU: blue

Function

--	--	--	--	--	--	--	--	--	--	--

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V
Installation type	non-flush
Thread	M12 x 1
Housing length	64.8 mm
Housing material	Brass (nickel-plated)
Material	PBT (Sensor probe)
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	increased operating distance
Product series	INE Extended
Switching output	npn, 200 mA, NO
Voltage drop (max.)	1.8 V (200 mA)
Switching distance (SN)	8 mm
Standardized measuring plate	24 x 24 x 1 mm
Switching hysteresis (max.)	1 ... 20 %
LED Anzeige	Yes



209338

DCB 12 MN 08 NS-B3

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Switching frequency

2000 Hz

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 67

Connection

Connector, M12, 3-pin, A-coded

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/209338>