



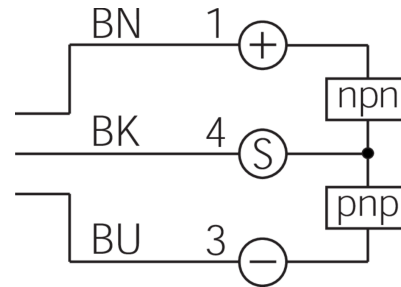

209759
KNS M8M 02B G3-T3
Capacitive proximity switch

- Large operating distance
- Detection of liquids, powdery and solid materials
- Detecting metal and non-metal parts
- Detection possible even through containers and packaging
- Sensitivity is adjustable via multi-turn potentiometer
- NO/NC, switchable
- Push-pull output pnp + npn
- Stainless steel housing

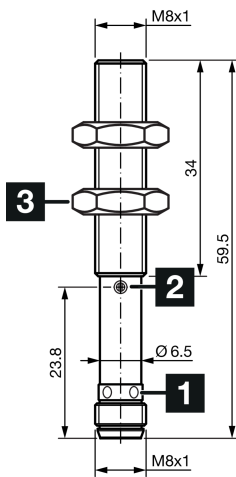

1) LED 4 x 90° (yellow)
 2) sensitivity

3) Width over flats 13 mm

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	18 ... 30 V DC
No-load current (max.)	15 mA (24 V DC)
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M8 x 1
Housing length	59.5 mm
Housing material	Stainless steel
Material	PBT (Sensor probe)
Weight	10 g
Protection class	III, operation on protective low voltage
Operating principle	Capacitive
Design	Thread
Scope of delivery	Setting tool
Switching output	Push-pull, 100 mA, NO/NC
Voltage drop (max.)	2.4 V
Switching distance (SN)	2 mm (0.1 to 3 mm adjustable)
Standardized measuring plate	8 x 8 mm
Switching hysteresis (max.)	15 %
Sensitivity adjustment	Potentiometer (11-turn)



209759

KNS M8M 02B G3-T3

Capacitive proximity switch

Technical data (typ.)	+20°C, 24 V DC
Display	LED yellow - Output signal
Switching frequency	100 Hz
Readiness delay (max.)	300 ms
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 65 / IP 67
Connection	Connector, M8, 3-pin, A-coded
More information / accessories	https://www.di-soric.com/209759