




212720
SLM4PO-1653
Safety light curtain

- Muting safety light curtain type 4
- Integrated muting function
- Integrable, pre-wired muting arms (MA, MZ) for fast commissioning as accessory
- Highest safety level
- Simple hardware configuration via connection line
- LEDs for light barrier's status and diagnostic
- High protection type

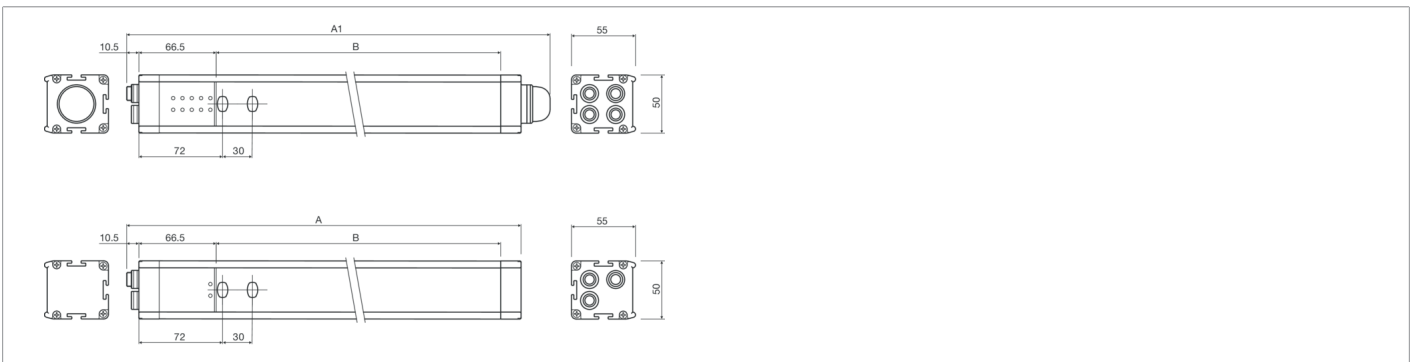

Function



Technical data (typ.)

+20°C, 5 V DC

Service voltage	19.2 ... 28.8 V DC
Inverse polarity protection	Yes
Short-circuit protection	Yes
Total height (A)	1770 mm
Total height (A1)	1745 mm
Mounting	T-groove, mounting bracket included in scope of delivery
Profile cross section	50 x 55 mm
Housing material	Aluminum (yellow, painted)
Material	Polycarbonate (Window)
Characteristic variables	Typ 4, PL-e, Typ 4 (IEC/TS 61496-2), SIL 3 (IEC 61508), SILCL 3 (IEC 62061), PL e - Kat. 4 (EN ISO 13849-1)
Protective function	Hand protection
Protection class	III, operation on protective low voltage
Model	Muting safety light grid
Start / restart	Automatic / manual (selectable)
External device (relay) monitoring - EDM	Feedback input, selectable release
Scope of delivery	one set of standard fixing brackets SFB-4SG
Safety output	pnp (2x), 400 mA / 24 V DC
Beam separation	30 mm
Number of beams	83
Protective field height (B)	1650 mm
Range	4000 mm (Low range) / 12000 mm (High range)
Resolution	30.0 mm
Reaction time	22 ms
Ambient temperature during operation	-30 ... +55 °C

**212720****SLM4PO-1653****Safety light curtain****Technical data (typ.)****+20°C, 5 V DC**

Protection type

IP 65 / IP 67

Transmitter connection

Connector M12, 5-pin (main plug), Socket M12, 5-pin (muting sensors, 2x)

Receiver connection

Connector M12, 12-pin (main plug), Socket M12, 5-pin (muting sensors, 2x), Socket M12, 5-pin (configuration PC)

Cable

unshielded connection cables max. 100 m

More information / accessories<https://www.di-soric.com/212720>