






200371
DCC 30 M 20 AIK-IBS
Inductive proximity sensor

- Analog voltage output
- Analog current output
- Metal connector
- Integrated amplifier
- Starting pulse suppression

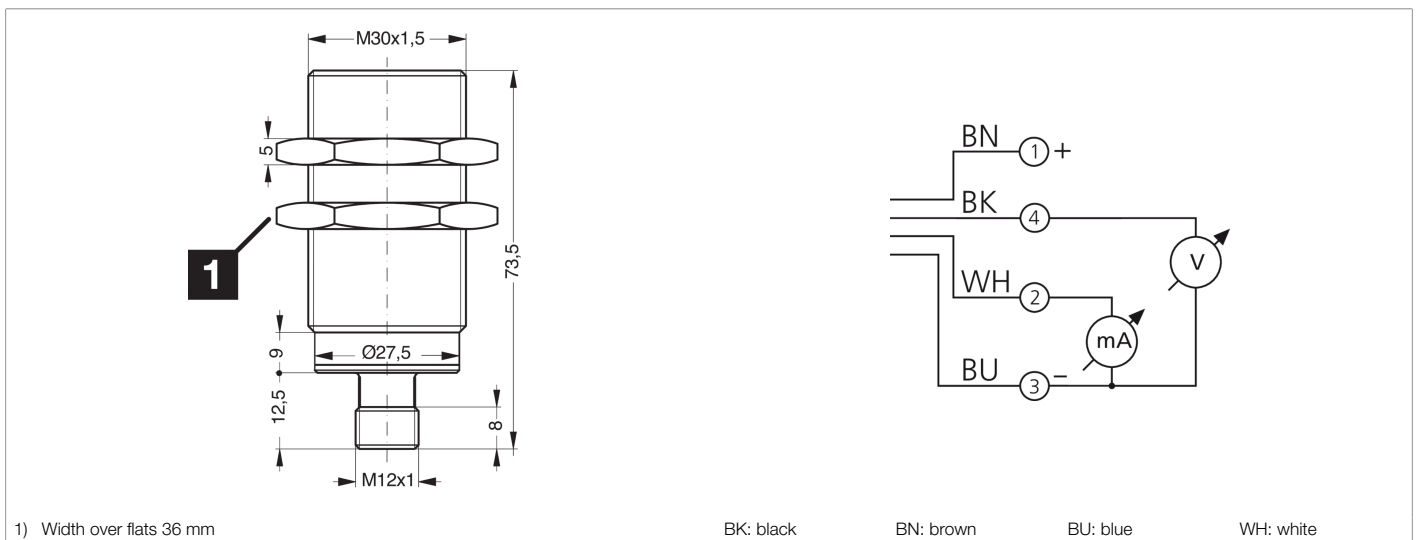

Function										
										 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
Internal power consumption	10 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	quasi-flush
Thread	M30 x 1.5
Housing length	73.5 mm
Housing material	Brass (CuZn, nickel-plated)
Tightening torque (max.)	70 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	analog
Design	Thread
Characteristics	extremely high operating distance
Product series	INA Analog
Analog output	0 ... 5 V, 1 ... 5 mA
Switching distance (SN)	0 ... 20 mm
Standardized measuring plate	60 x 60 x 1 mm
Switching frequency	500 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67



200371
DCC 30 M 20 AIK-IBS
Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Connection

Connector, M12, 4-pin, A-coded

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/200371>