




202855

TKHM-Z/TSM-Z/P4

Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

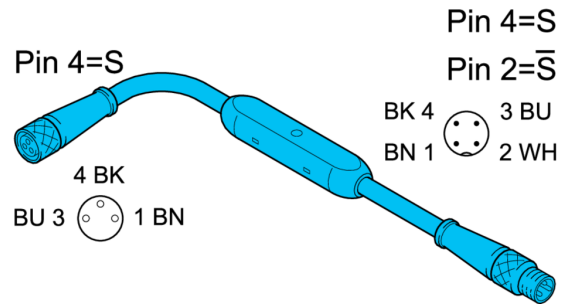

1) Potentiometer (only ...TSM-Z/T) 3) LED SWITCHING OUTPUT

2) LED STATUS

4 BK
BU 3 1 BN (S)

Kupplung
Coupling
M8

WH 2 (\bar{S}) 4 BK (S)
BN 1 3 BU

Stecker
Connector
M8

BK: black BN: brown BU: blue WH: white

Function										

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	15 ... 35 V DC
No-load current (max.)	20 mA
Thread	M8 x 1
Housing material	Plastic
Protection class	III, operation on protective low voltage
Evaluation	pnp antivalence device
Application	Digital signal
Function selection	pnp
Switching output	pnp (2x)
Switching frequency	3500 Hz
Ambient temperature during operation	-20 ... +70 °C
Protection type	IP 67
Connection	Pigtail, Coupling, M8, 4-pin
Connection 2	Pigtail, Connector, M8, 3-pin

More information / accessories <https://www.di-soric.com/202855>