





205371
DCC 12 VL 06 NOLK
Inductive proximity sensor

- For the food industry
- For saltwater applications
- Large operating distance to steel and aluminum
- Closed, all-steel sleeve
- Protection class IP 68 and IP 69K
- Connection cable made of TPE-S
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED



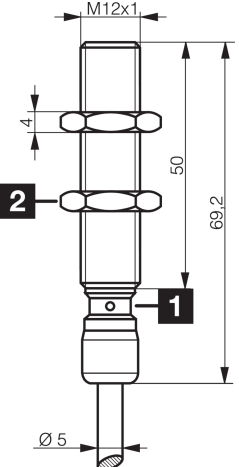


1) LED 2) Width over flats 17 mm

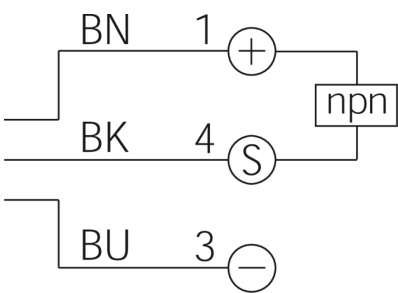

BN 1 (+)
 BK 4 (S)
 BU 3 (-)

BK: black
BN: brown
BU: blue

| Function | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|---|
| | | | | | | | | | |   |

| Technical data (typ.) | +20°C, 24 V DC |
|------------------------------|---|
| Service voltage | 10 ... 30 V DC |
| No-load current (max.) | < 10 mA |
| Insulation voltage endurance | According to IEC 60947-5-2 (7.2.3.1) |
| Installation type | Flush |
| Thread | M12 x 1 |
| Housing length | 69.2 mm |
| Housing material | Stainless steel (1.4435 / AISI 316L) |
| Material of cable | TPE-S |
| Tightening torque (max.) | 20 Nm |
| Protection class | III, operation on protective low voltage |
| Operating principle | inductive |
| Evaluation | digital |
| Design | Thread |
| Characteristics | extremely high operating distance, < 80 bar, Full-metal casing closed |
| Product series | INW-100 Full metal |
| Switching output | npn, 200 mA, NC |
| Voltage drop (max.) | 2 V |
| Switching distance (SN) | 6 mm |
| Standardized measuring plate | 18 x 18 x 1 mm |
| Switching hysteresis (max.) | 15 % |



205371

DCC 12 VL 06 NOLK

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Switching frequency

600 Hz

Ambient temperature during operation

-25 ... +85 °C

Protection type

IP 68 / IP 69K

Connection

Cable, 2.0 m (flying leads)

More information / accessories

<https://www.di-soric.com/205371>