




207441
BEK-D70-G2TI-K-BS
Dark field light

- To detect the finest changes in surface
- Constant level of light intensity over the entire voltage range
- Homogeneous illumination
- Protection class IP 67
- Low levels of heat produced
- External trigger input
- High efficiency
- Light intensity can be adjusted
- Sturdy housing design

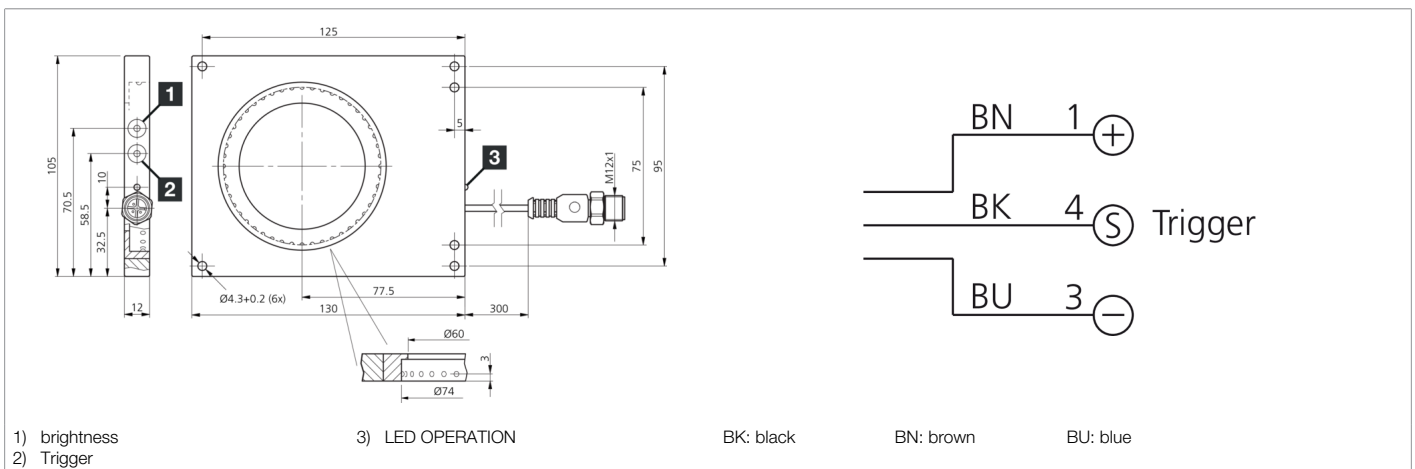

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current (max.)	220 mA (24 V DC)
Power	5.5 W (24 V DC)
Inverse polarity protection	Yes
Insulation voltage endurance	500 V
Illuminated area	Ø 70
Housing dimensions	105 x 130 x 12 mm
Diameter	Ø 70 mm (Diameter)
Housing material	Aluminum (Black, Anodized)
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Design	Dark field light
Characteristics	Trigger input
Trigger input high level	3.3 ... 35.0 V
Trigger input low level	< 2.8 V
Light source	LED
Color	green
Wavelength	525 nm
Deflection angle FWHM	40°
Control	Integrated power control
Display	LED Green - Operating display
On-delay time (Trig.)	0.400 ms



207441

BEK-D70-G2TI-K-BS

Dark field light

Technical data (typ.)	+20°C, 24 V DC
Switch off delay (Trig.)	0.120 ms
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C (Continuous operation)
Protection type	IP 67
Connection	Pigtail, 0.3 m, M12, 3-pin
Connection cable	VK ...
More information / accessories	https://www.di-soric.com/207441